NB-BlackSilentFan X 80mm (PC Fan)

Datenblatt DC-Axiallüfter - data sheet DC-axial compact Fan

12/2010

High Quality Class Fan

sleeved cable - ultrasilent bearing - designed in germany

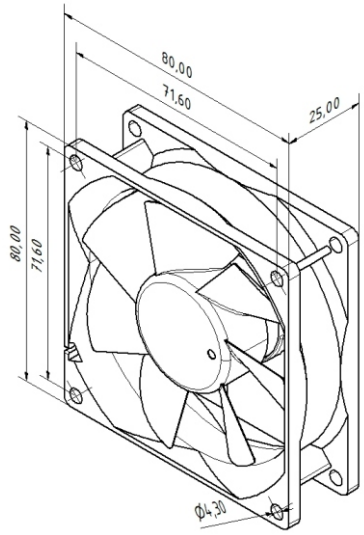

	X-1	X-2	XC-1
Maße/ size (mm)	: 80x80x25mm	: 80x80x25mm	: 80x80x20mm
Gewicht/ weight (g)	: 80 g	: 80 g	: 60 g
Nennspannung/ rated voltage (V)	: 5-13,2 V	: 4-13,2 V	: 7-13,2 V
Startspannung/ start voltage (V)	: 5 V	: 4 V	: 7 V
Leistungsaufnahme/ input power voltage (W)	: 0,48 Watt	: 0,72 Watt	: 1,44 Watt
Nenndrehzahl (U/min)/ rpm (12V)	: 1300 +/- 10%	: 1800 +/- 10%	: 1700 +/- 10%
Luftförderleistung/ air flow (m /h)	: 26 m^3/h	: 45 m^3/h	: 35,7 m^3/h
Luftförderleistung/ air flow (CFM)	: 15 cfm	: 26,5 cfm	: 21 cfm
Betriebslautstärke/ acoustical noise (dB/A)	: 10 dB/A	: 18 dB/A	: 21 dB/A
Lifetime MTBF (25° C/ or 77° F) (hours)	: 80 000 Std. / h	: 80 000 Std./ h	: 50 000 Std./ h
Temperaturbereich/ operating temperature	: -10°C~ +65°C	: -10°C~ +65°C	: -10°C~ +65°C
Garantie/ warranty	: 3 Jahre/ years	: 3 Jahre/ years	: 3 Jahre/ years
Barcode/ EAN code	: 4250051901306	: 4250051901313	: -Bulk-

Alle Angaben ohne Gewähr, Irrtümer und Änderungen vorbehalten/ All technical information are supplied without liability

Material Rahmen/ frame	: PBT (Polybutylenterephthalat)
Material Rotorblatt/ impeller	: PC (Polycarbonat)
Lagerart/ bearing system	: NB-Longlife Sleeve Bearing
Anschluss/ connector	: 3Pin Molex (PC) Tachosignal
Einsatzzweck/ operation purpose	: PC, HDD cases, Multimedia
Verpackungseinheit/packing unit	: 80 Stück /pcs

CE RoHS conform

Inklusive /Included: 4x NB-SLICS (only X-1 +X-2)

BLACKNOISE® - Giesenheide 25 - D-40724 Hilden - Phone: +49 (0)2103/ 25 57-0 - Fax: +49 (0)2103/ 25 57-20 - www.noiseblocker.de - info@blacknoise.com

© 2011 Blacknoise - (((NB)))® & (((Noiseblocker)))® are registered Trademark of BLACKNOISE® Germany